




2400AF

Pond Aerator

1/2HP, 120V, Single Phase

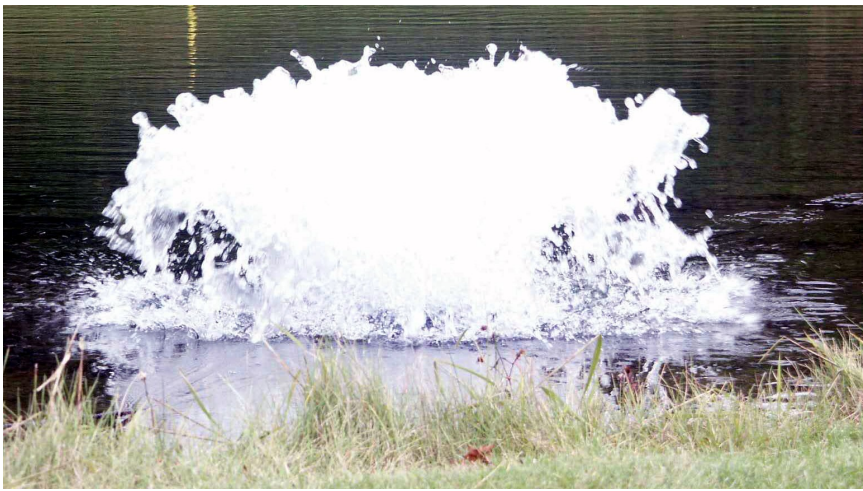

Operation

- ⇒ Submersed motor with top intake pushes the water into the air using an open propeller design.
- ⇒ Individual water droplets absorb oxygen from the atmosphere and return to the body of water transferring oxygen from the air and into the water.
- ⇒ Moving water mixes and agitates the water, spreading oxygenated water throughout the body of water.
- ⇒ Single open propeller design allows for greater water flow with a lower likelihood of clogging and smaller water droplets to increase total surface area for oxygen transfer.
- ⇒ Coated stainless steel cage/propeller guard shall catch large debris and assist in reducing the likelihood of clogging while allowing for maximum water flow into the unit.

Quick Facts

- ⇒ Available in 120 Single Phase Power
- ⇒ Complete Package includes Assembled Motor Unit, UV Resistant High Density Thermoplastic Float, Two 50' Braided Nylon Mooring Lines, and SJTOW Rated 3 Wire Power Cable
- ⇒ Operates in 15" (38cm) of Water
- ⇒ Total Component Listed by ETL to meet UL and CSA Standards for Safety in Water
- ⇒ Sacrificial Anode Installed for Corrosion Protection and use in Salt Water Applications
- ⇒ Series 300 Austenitic Stainless Steel Construction of Exposed Metal; Salt Water Compatible
- ⇒ 2 Year Warranty
- ⇒ UPS Shippable
- ⇒ Power Cable Potted Quick Disconnect on 12 Gauge Cord Options with Stainless Steel Strain Relief
- ⇒ Energy Efficient with Excellent GPM/kW Rates
- ⇒ Industrial Strength Design
- ⇒ Top Intake for Shallow Water Operation
- ⇒ Optional Bottom Screen with 84 Vertical Screening Bars with Less Than 1" Gaps to Keep Debris Out and Allow for Maximum Water Flow Into the Unit
- ⇒ Optional Power Control Panel with 24 Hour Mechanical Timer and Class A Human Rated GFI in 120V

2400AF Pond Aerator Produces a Crown of Water at the Surface

Features

Motor Unit

- ⇒ 1/2HP, 120V, Single Phase
- ⇒ 1750 RPM Motor
- ⇒ Oil Cooled, Continuous Duty Rated
- ⇒ Two Long Life Bearings
- ⇒ Thermal Overload Protection
- ⇒ Fully Unitized Heavy Duty Carbon Ceramic Mechanical Seal
- ⇒ Series 300 Austenitic Stainless Housing with Engineering Grade Thermoplastic Top
- ⇒ Protective Coated Series 300 Austenitic Stainless Steel Cage/Prop Guard with 18 Vertical Bars and 1.5" Spacing
- ⇒ UV Resistant 2 Blade Engineered Thermoplastic Propeller

Float

- ⇒ U.V. Resistant High Density Thermoplastic
- ⇒ Closed cell foam filling
- ⇒ Single Piece Float
- ⇒ Protective Coated Series 300 Stainless Steel Hardware
- ⇒ Two 50' Braided Nylon Mooring Ropes

Optional Control Panel

- ⇒ U.L. Listed per N.E.C.
- ⇒ 15 Amp Class A Human Rated GFCI Outlet (120V)
- ⇒ Surge Protector (240V)
- ⇒ NEMA Type 3R Weatherproof Enclosure
- ⇒ 24 Hour Mechanical Timer

Power Cable

- ⇒ SJTOW UL, CSA, & NEC Approved Underwater Rated Cable
- ⇒ 3 Wire
- ⇒ Available in 50', 100', 150', and 200' (250', 300', 400' and 500 in 240V) Options (Cord Gauges depend on length)
- ⇒ Potted Quick Disconnect and Stainless Steel Strain Relief Standard on 12 Gauge and Larger Cords
- ⇒ 6' Flex Sleeve Protection

Optional Bottom Screen


- ⇒ Protective Coated Stainless Steel
- ⇒ 84 Vertical Screening Bars w/ Gaps Tapered from .875" to .188" on Bottom Screen
- ⇒ 7.5" H x 23" Tapering to 8.25" Diameter
- ⇒ Protective Coated Series 300 Stainless Steel Attachment Hooks

Kasco 2400AF Specifications


Model #	HP	Cord Length	Cord Gauge*	Voltage/Phase/Hz	Running Amps	Lock Rotor Amps	Sugg. Pond Size (SA)**	Min. Depth of Operation	Shipping Weight	Number of Boxes
2400AF050	1/2	50'	16/3	120/1/60	5.0	12	Up to 1/2	15"	46 Lbs.	2
2400AF100	1/2	100'	14/3	120/1/60	5.0	12	Up to 1/2	15"	50 Lbs.	2
2400AF150	1/2	150'	12/3	120/1/60	5.0	12	Up to 1/2	15"	66 Lbs.	3
2400AF200	1/2	200'	12/3	120/1/60	5.0	12	Up to 1/2	15"	72 Lbs.	3

* 12 AWG cords include potted quick disconnect and stainless steel strain relief.


** Surface acreage (SA) is determined by multiplying length x width of the pond. The actual shape, depth, and oxygen demand should be considered when selecting a unit size.

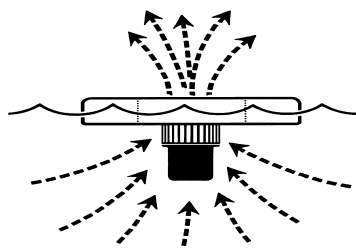

During unit operation, water is circulated from 360° around the unit as well as from below. Top intake for shallow water operation.

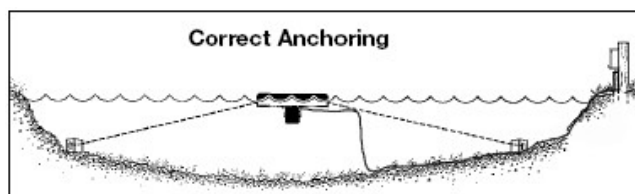

Assembly and Installation of Kasco equipment is quick and easy. Each unit includes an Owners Manual with specific steps to assemble, install, and operate the equipment properly.

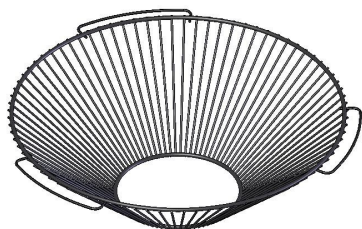

Optional coated stainless steel bottom screen helps protect the unit from debris. The bottom screen has 84 vertical bars with gaps less than 1".



Optional UL Approved Control Panel complete with Class A Human Rated GFCI Protection, 24 Hour Mechanical Timer, and Photo Eye for Optional Light Kit. NEMA Type 3r weatherproof enclosure.



The motor unit sits in the float using coated stainless steel hooks for an easy and secure assembly. The single section, U.V. resistant, high density thermoplastic float, with closed cell foam filling, allows for excellent durability with low visibility.

Kasco Marine, Inc.
800 Deere Rd.
Prescott, WI 54021

Ph: (715) 262-4488 * Fax: (715) 262-4487
www.KascoMarine.com * www.GotAlgae.com
Sales@KascoMarine.com

